


The deflection values were determined in tests after 24 hours of immersion in water.
The fibre direction of the cover layers is vertical to the supports.

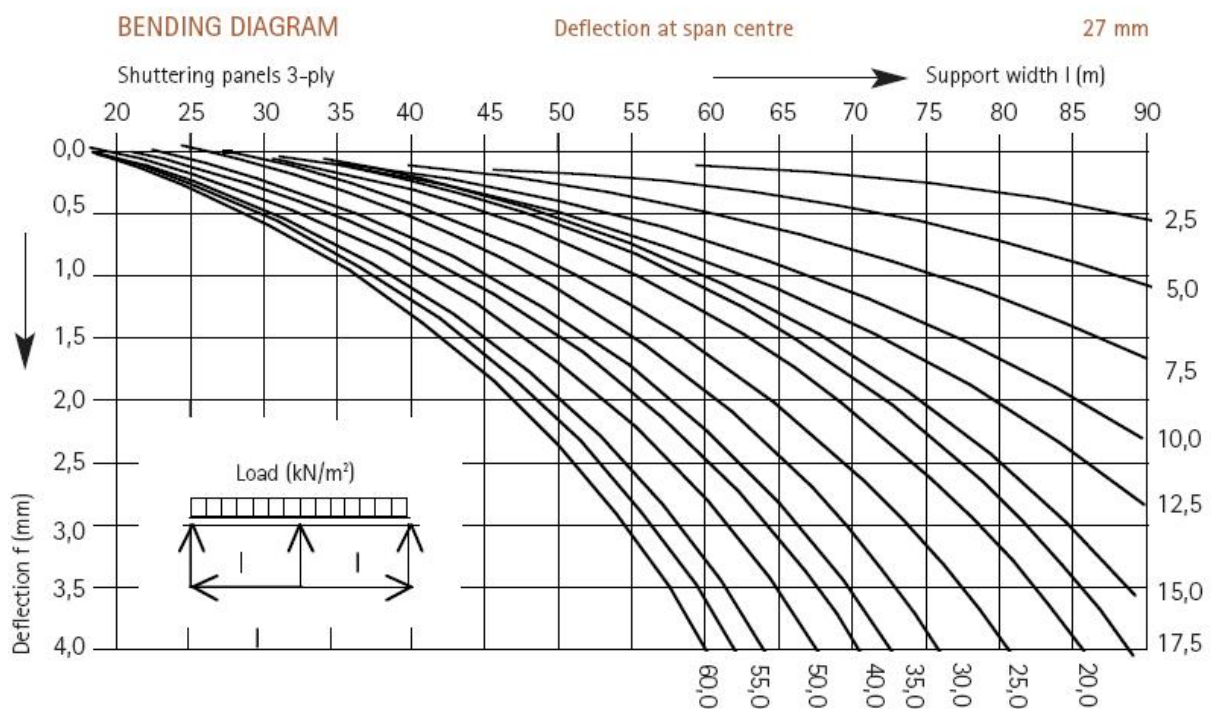

The deflection values were determined in tests after 24 hours of immersion in water.
The fibre direction of the cover layers is vertical to the supports.